

Secure Face Matching Using Fully Homomorphic Encryption

Vishnu Naresh Boddeti
Michigan State University
East Lansing, MI
vishnu@msu.edu

Abstract

Face recognition technology has demonstrated tremendous progress over the past few years, thanks to advances in representation learning. As we witness the widespread adoption of these systems, it is imperative to consider the security of face representations. In this paper, we propose a data encryption based framework to secure databases of face representations, with the goal of preventing information leakage and preserving the privacy of users, while maintaining its utility. Specifically, we explore the possibility of using a fully homomorphic encryption based scheme for matching face representations directly in the encrypted domain along with a dimensionality reduction scheme to trade-off face matching accuracy and computational complexity. Experiments on benchmark face datasets (LFW, IJB-A, IJB-B, CASIA) indicate that secure face matching is practically feasible (0.01 sec per match pair for 512-dimensional features from SphereFace[25]) while exhibiting minimal loss in matching performance.

1. Introduction

Face recognition is the science of determining the identity of people through their characteristic facial appearance. Being the primary biometric modality for human identification this topic has received tremendous attention in the pattern recognition and biometrics communities. There has been a steady progress in face recognition accuracy over the past few decades, much of which can be attributed to deep learning over the past few years. Thanks to progress in learning feature representations, automated face recognition systems are now believed to surpass human performance in some scenarios [28]. Consequently, face recognition technology is witnessing wide spread adoption in numerous practical applications, such as surveillance systems, social media and law enforcement. However, the increased deployment of such technology also makes it an attractive target of malicious attacks.

A typical face recognition system acquires a facial im-

age which undergoes some pre-processing following which high-dimensional features are extracted. During enrollment these features vectors are stored in a database along with their identity labels. This database is then used to verify a person's claimed identity (face verification) or determine a person's identity (face identification).

The simplest and foremost point of attack on face recognition systems is the database of face representations. Therefore, directly storing the facial feature vectors in the database can significantly compromise the security of the authentication system and also violate the privacy of the enrolled users. For instance, it has been demonstrated recently [29] that access to the representations can enable the reconstruction of a user's original facial image by a malicious attacker. The reconstructed face images were shown to be of sufficient quality to be successfully matched by a state-of-the-art face recognition system. Similarly, soft facial attributes such as age, gender, ethnicity etc. can be predicted with high accuracy from facial features [26]. Therefore, it is imperative to devise techniques to prevent information leakage from face representations while preserving face matching performance, thereby preventing attacks of this nature. Addressing this problem is the central aim of this paper.

An attractive solution for secure face matching is the use of *cryptosystems* to secure the face template database and perform matching over encrypted data. However, these methods have not found much traction in the biometrics and pattern recognition community due the inherent inability of arbitrary encryption schemes to support arithmetic operations, necessary for template matching, directly in the encrypted domain. On the other hand, *homomorphic cryptosystems* are a special class of cryptosystems that do allow for basic arithmetic operations over encrypted data [15]. These systems can be broadly categorized into three classes, (1) partially homomorphic encryption systems that support only a single arithmetic operation i.e., either addition [33] or multiplication [13] in the encrypted domain, (2) somewhat homomorphic systems that support a limited number of both additions and multiplications, and (3) fully homomorphic encryption systems that support unlimited addi-

tions and multiplications directly in the encrypted domain. These three different kinds of systems offer a trade-off between generalization and computational complexity. Therefore, while the latter systems are more general they are significantly more computationally complex than the former systems.

In this paper, we present an approach to cryptographically secure the database of face templates and the feature vector of the presented face image while matching them directly in the encrypted domain. Our approach is based on *fully homomorphic encryption* (FHE) schemes [16] that can support a series of basic arithmetic operations such as additions and multiplications over encrypted data. Therefore, breaking down the face matching process into its constituent addition and multiplication operations can enable face matching in the encrypted domain. This property of the FHE schemes protects the database of face templates by encrypting them in such a way that facial matching can be performed directly in the encrypted domain.

The ability to encrypt the database of face templates and match them directly in the encrypted domain without the need for decrypting the templates affords many benefits, including the desired properties of template protection schemes [30]:

Diversity: Using different encryption and decryption keys across different databases can protect the database against cross-matching attacks. **Revocability:** Compromised templates can be revoked and reissued simply by changing the encryption and decryption keys for homomorphic encryption. **Security:** The security of the face template database is cryptographically guaranteed by the hardness of the ring learning with errors problem [9]. Therefore, it is computationally very hard to obtain the original face template without the decryption key. **Performance:** Since homomorphic encryption admits addition and multiplication of integers directly in the encrypted domain, the proposed scheme can maintain the recognition performance, in terms of FAR and FRR, of the face recognition system. **Privacy:** The inability to access the original face template without the decryption keys can help preserve the privacy of the users preventing the estimation of either the original image [29] or any soft biometric traits [26].

The key technical barrier to realizing homomorphic encryption based face matching is the computational complexity of homomorphic encryption, especially homomorphic multiplication. This limitation renders it unsuitable for many tasks that need to operate on high-dimensional vectors. For instance, in this paper, we consider face representations that are hundreds to thousands of dimensions, thereby necessitating as many costly homomorphic operations. Therefore, a straight-forward application of fully homomorphic encryption for face matching requires more than 0.6 secs for matching a single pair of 512-dimensional

face templates. Therefore to practically address this limitation and securely match face templates directly in the encrypted domain we propose two solutions, (1) utilize a packing scheme that allows homomorphic multiplication of multiple values at once, and (2) reduce the dimensionality of the face templates.

The primary contributions of our work are as follows: (1) the first work to explore encrypted face matching using fully homomorphic encryption, and (2) dimensionality reduction coupled with a batching scheme that significantly reduces the computational burden of encrypted face matching.

2. Related Work

Privacy and Security: The idea of using encryption for biometric security is not new and a number of approaches have been proposed to bring together biometric authentication and traditional cryptography. Soutar *et al.* [45, 46] proposed one of the earliest systems for biometric encryption. The idea of using visual cryptography [32] on raw biometric data was also explored in the context of fingerprint images [37], iris templates [39] and face images [40] to ensure biometric privacy while maintaining the ability to match biometric images. Fuzzy vault [21] based approaches have been proposed in the context of biometric authentication for fingerprint images [51] and iris patterns [24]. These approaches embed secret biometric information within a fuzzy vault through a set of features in such a way that the secret information can be recovered even with features that are close to the ones used for the encoding. In contrast our solution, these approaches are not designed to maintain full utility (performance wise) of the encrypted biometrics.

Homomorphic Encryption for Biometrics: A few biometric authentication approaches [23, 6] based on homomorphic encryption [18] have been proposed, almost all of them in the context of matching binarized templates. The primary attraction for homomorphic encryption is the ability to perform basic arithmetic operations such as additions and multiplications in the encrypted domain. Penn *et al.* [36] leverage [33] a Paillier cryptosystem, a partially homomorphic encryption system that supports addition over encrypted data, for matching binary iris templates. Barni *et al.* [4, 5] also leverage a Paillier cryptosystem for matching fingerprints using fingercode templates where the probe is encrypted while the database remains unencrypted, thus providing no security to the fingerprint database. Similarly, Aono *et al.* [3] and Cheon *et al.* [10] propose to use a fully homomorphic encryption system for matching binary iris templates with high computational efficiency. In contrast to this prior work, in this paper, we explore the possibility of using fully homomorphic encryption to secure high-dimensional real-valued face templates while matching them in the encrypted domain. Our work is similar in spirit to the fully homomorphic encryption face verifi-

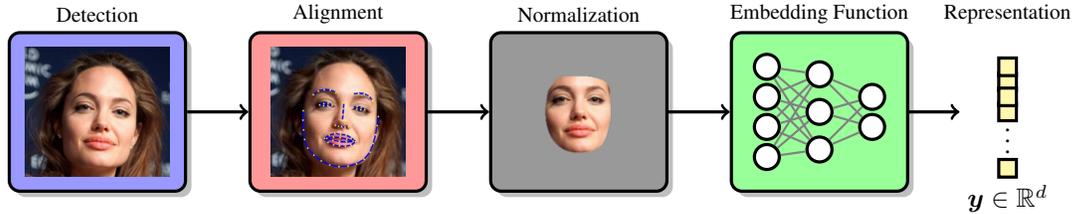


Figure 1: A typical **face representation pipeline** comprises of face detection, alignment, normalization and feature extraction. The embedding function maps a high-dimensional normalized face image to a d -dimensional vector representation.

ation system proposed by Troncoso-Pastoriza *et al.* [49]. However, their system suffers from very high computational complexity (100 secs per match pair). In contrast, this paper proposes solutions to significantly improve computational efficiency of face matching over encrypted templates (0.01 sec per match pair).

Biometric Template Protection: A number of approaches have been proposed to secure biometric templates, see Jain *et al.* [20] for an excellent overview. These approaches resort to a pattern recognition based approach for template protection, instead of relying on the security afforded by cryptographic systems. Davida *et al.* [12] and Radha *et al.* [38] proposed non-invertible transformation functions to protect the biometric template. Cancelable biometrics [35] are another approach to protect biometric templates while allowing for revocability and diversity of these templates. Key-binding systems [31, 7] secure a biometric template by monolithically binding it with a key within a cryptographic framework. All the aforementioned approaches however trade-off security and matching performance i.e., they either suffer significant loss of matching performance or do not provide adequate security cryptographically. In contrast to these approaches, the homomorphic encryption based scheme explored in this paper does not suffer from this trade-off and can offer high levels of cryptographic security without adversely sacrificing matching performance.

Face Recognition: There is a vast body of work studying the topic of face recognition. While an exhaustive survey of the literature is beyond the scope of this paper, we present a few notable and recent approaches. Among the earliest learning based approaches, Turk and Pentland proposed Eigenfaces [50] that relied on principal component analysis (PCA) of data. Later on approaches that relied on high-dimensional local features of faces such as, local binary patterns (LBP) [1], scale-invariant feature transform (SIFT) [27] and histogram of oriented gradients (HoG) [2], were more prevalent. However, recent developments in deep neural network based representation learning has contributed to massive strides in face recognition capabilities. These approaches [47, 42, 34, 25] rely on end-to-end learning of feature extraction models using convolutional neural networks

(CNNs). Our goal in this paper to ensure secure matching of the face templates extracted from such representation models, as opposed to developing a novel face representation model. Therefore, we utilize the FaceNet [42] (128-dimensions) and the SphereFace [25] (512-dimensions) as our choice of face representation.

3. Approach

We first describe the setting of our problem and provide a high-level outline of our approach. Our goal is to explore the possibility of using fully homomorphic encryption for face matching over the encrypted face templates. First we describe the face matching process and break it down to its constituent operations, additions and multiplications. Then we introduce fully homomorphic encryption, following which we describe solutions to reduce the computational burden of face matching over encrypted data.


3.1. Problem Setup

A typical face recognition system consists of a database of face representations $\mathbf{X} = \{\mathbf{x}_1, \dots, \mathbf{x}_n\}$ that have been extracted from the enrollment images of the subjects in the database (see Fig. 1 for a pictorial illustration of the feature extraction process). During deployment, a user who wishes to get authenticated provides their facial image from which a representation \mathbf{y} is extracted. This representation is then matched against the templates in the database. The result of the matching process is a score that determines the degree of dissimilarity between \mathbf{y} and \mathbf{X} . The dissimilarity score between two representations $\mathbf{x} \in \mathbb{R}^d$ and $\mathbf{y} \in \mathbb{R}^d$ is typically defined as,


$$d(\mathbf{x}, \mathbf{y}) = 1 - \frac{\mathbf{x}^T \mathbf{y}}{\|\mathbf{x}\| \|\mathbf{y}\|} = 1 - \tilde{\mathbf{x}}^T \tilde{\mathbf{y}} = 1 - \sum_{i=1}^d \tilde{x}_i \tilde{y}_i \quad (1)$$

where $\tilde{\mathbf{x}} = \frac{\mathbf{x}}{\|\mathbf{x}\|}$ is the normalized representation. Therefore, the face matching process is comprised of d scalar multiplications and d scalar additions.

In this paper, we seek to devise a solution to preserve the privacy of the database \mathbf{X} as well as the probe \mathbf{y} and prevent any leakage of private information about the user's facial

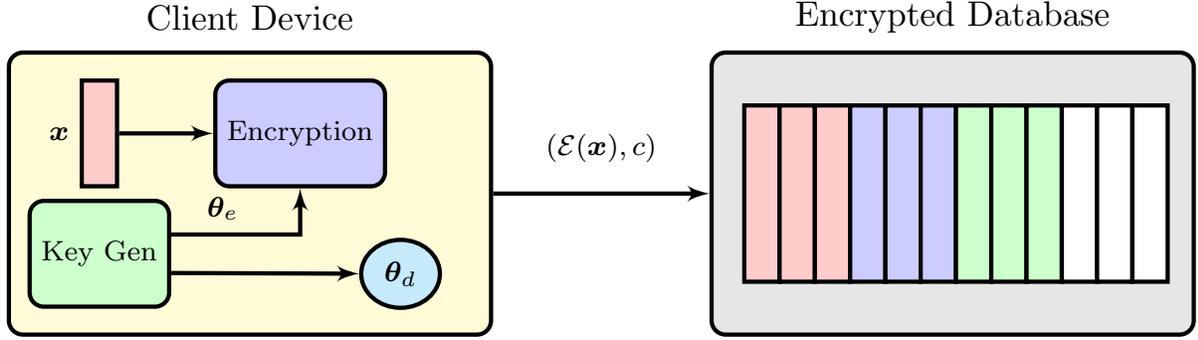

(a) **Enrollment:** During this phase the user generates the key pair (θ_e, θ_d) , encrypts feature vector \mathbf{x} with the public key θ_e and transmits the encrypted feature vector and the user identity. The private key θ_d however remains on the client device.

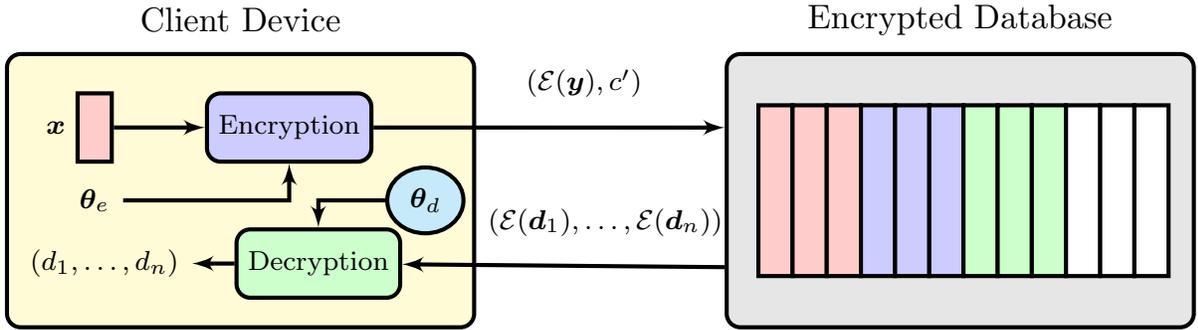

(b) **Authentication:** During this phase, a user seeks to get authenticated, encrypts the probe feature vector with the public key θ_e and transmits to the database along with the claimed identity. The database computes the dissimilarity score over encrypted features and transmits the matching score to the client, where it is decrypted with the private key θ_d .

Figure 2: Enrollment and authentication protocols for secure face matching using fully homomorphic encryption.

appearance. This can be achieved through a parameterized function that transforms the face representation from the original space into an alternate space, i.e., $\mathcal{E}(\mathbf{x}) = f(\mathbf{x}; \theta_e)$ and $\mathcal{E}(\mathbf{y}) = f(\mathbf{y}; \theta_e)$, where $f(\cdot; \theta_e)$ is the transformation function with parameters θ_e and $\mathbf{x} = g(\mathcal{E}(\mathbf{x}); \theta_d)$ and $\mathbf{y} = g(\mathcal{E}(\mathbf{y}); \theta_d)$, where $g(\cdot; \theta_d)$ is the inverse transformation function with parameters θ_d . While many such transformation functions exist, the key idea of our paper is to use transformation functions that can cryptographically guarantee the security of the original features \mathbf{x} (without knowledge of θ_d) while allowing for matching face representations in the transformed space without loss of accuracy i.e.,

$$d(\mathcal{E}(\mathbf{x}), \mathcal{E}(\mathbf{y})) = d(f(\mathbf{x}, \theta_e), f(\mathbf{y}, \theta_e)) \approx d(\mathbf{x}, \mathbf{y}) \quad (2)$$

Transformation functions that satisfy this property enable us to preserve the privacy of the users. Even if a malicious attacker can gain access to the database of face representations, without access to the inverse transformation parameters θ_d the attacker will not be able to estimate the facial image of the user or extract any other soft biometric attribute inherent to the face representation.

3.2. Enrollment and Authentication Protocols

We now describe a protocol for user enrollment and authentication using the cryptographic transformation function described above. We consider a scenario with two entities, a *device* and *database*, where the latter could also possibly reside on the former.

Enrollment: During this phase the c -th user performs the following actions on the *device* (1) generate pair of keys, a public encryption key θ_e^c and a private decryption key θ_d^c (each user can have their own pair of keys), (2) transmit the public key θ_e^c to the *database*, (3) capture a series of images of the face, (4) extract the representation of the acquired face images $\mathbf{X}^c = \{\mathbf{x}_1^c, \dots, \mathbf{x}_{n_c}^c\}$ where n_c is the number of enrollment samples for the c -th user, (5) encrypt the face images using the public key θ_e^c , and (6) and finally transmit the encrypted templates to the database along with the identity label. On the *database* the encrypted templates, the public key θ_e^c and identity label are added to the database. Figure 2a shows an illustration of this process.

Authentication: During this phase the *device* seeks to authenticate the user through the following process: (1) the

user’s facial image is acquired following which the representation \mathbf{y} is extracted, (2) this representation is encrypted using the public key θ_e , which can possibly be different from θ_e^c , (3) transmit the encrypted representation, the claimed identity (id) and the public encryption key θ_e if it is different from θ_e^c . At the database if the encryption key of the probe is different from the encryption key of the user’s template, the database executes key switching on the probe without having to decrypt it, (5) compute the dissimilarity score $d(\mathcal{E}(\mathbf{y}), \mathcal{E}(\mathbf{x}_k^{id}))$ for all the templates of the id -th identity, (6) the encryption key of the scores are switched back to θ_e , and transmitted back to the device. Finally, at the device, the encrypted scores are decrypted using the secret decryption key θ_d to verify the identity of the user. Figure 2b shows an illustration of this procedure.

3.3. Homomorphic Encryption: A Primer

We first introduce the main ideas behind fully homomorphic encryption and describe a straight-forward but computationally expensive application of FHE to our face matching problem.

Mathematical Notation: We describe the notation of modular arithmetic that forms the basis of homomorphic encryption systems. For $t \in \mathbb{Z}$ a ring $R_t = \mathbb{Z}_t[x]/(x^n + 1)$ represents polynomials of degree less than n with the coefficients modulo t . The operators $[\cdot]$, $\lceil \cdot \rceil$ and $\lfloor \cdot \rfloor$ denote rounding down, up and to the nearest integer respectively. The operator $[\cdot]$ denotes the reduction of an integer by modulo t , where the reductions are performed on the symmetric interval $[-t/2, t/2)$. The operators when applied to a polynomial are assumed to act independently on the coefficients of the polynomial. $a \xleftarrow{\$} \mathcal{S}$ denotes that a is sampled uniformly from the finite set \mathcal{S} . Similarly, $a \leftarrow \chi$ denotes that a is sampled from a discrete truncated Gaussian.

Fan-Vercauteren Scheme [14]: Any number, integer or rational, first needs to be encoded in a ring R_t before it can be encrypted. Similarly, the encrypted numbers are encoded as polynomials in the ring R_q . Let λ be the desired level of security, w be a base to represent numbers in, and let $l = \lfloor \log_w q \rfloor$ be the number of terms in the decomposition of q into base w . The FV scheme utilized three keys, the private decryption key θ_d , the public encryption key θ_e and the evaluation keys evk necessary for multiplication over encrypted data. Below are the details of key generation, addition and multiplication over encrypted integers.

- Gen Secret Key (λ): Sample $\theta_d \xleftarrow{\$} R_2$
- Gen Public Key (θ_d): Sample $\mathbf{a} \xleftarrow{\$} R_q$ and $e \xleftarrow{\$} \chi$. Output $\theta_e = ([-(as + e)]_q, \mathbf{a})$
- Gen Evaluation Key (θ_d, w): for $i \in \{0, \dots, l\}$, sample $\mathbf{a}_i \xleftarrow{\$} R_q, e_i \leftarrow \chi$.

$$\text{Output } evk = ([-(\mathbf{a}_i \theta_d + e_i) + w^i \theta_d^2]_q, \mathbf{a}_i)$$

- Encrypt(m, θ_e): For $m \in R_t$, sample $u \xleftarrow{\$} R_2$ and $e_1, e_2 \leftarrow \chi$. Output $ct = ([m + \theta_e[0]u + e]_q, [\theta_e[1]u + e]_q)$
- Decrypt(ct, θ_d): Output $\left[\left\lfloor \frac{t}{q} [ct[0] + ct[1]\theta_d] \right\rfloor \right]$
- Add(ct_0, ct_1): Output $(ct_0[0] + ct_1[0], ct_0[1] + ct_1[1])$
- Multiply(ct_0, ct_1): Compute:

$$c_0 = \left[\left\lfloor \frac{t}{q} (ct_0[0]ct_1[0]) \right\rfloor \right]_q$$

$$c_1 = \left[\left\lfloor \frac{t}{q} (ct_0[0]ct_1[1] + ct_0[1]ct_1[0]) \right\rfloor \right]_q$$

$$c_2 = \left[\left\lfloor \frac{t}{q} (ct_0[1]ct_1[1]) \right\rfloor \right]_q$$

$$c_2 = \sum_{i=0}^l c_2^{(i)} w^i \text{ and compute}$$

$$c'_0 = c_0 + \sum_{i=1}^l evk[i][0]c_2^i$$

$$c'_1 = c_1 + \sum_{i=1}^l evk[i][1]c_2^i$$
 Output (c'_0, c'_1)

The algorithm described above enables us to perform face matching in the encrypted domain. The face dissimilarity score described in Eq. 1 can be computed in the encrypted domain as:

$$d(\mathbf{x}, \mathbf{y}) = 1 - g \left(\sum_{i=1}^d \mathcal{E}(\mathbf{x}_i) \mathcal{E}(\mathbf{y}_i), \theta_d \right) \quad (3)$$

where computing the inner product over encrypted data would necessitate d encrypted multiplications and $d - 1$ encrypted additions. Since each encrypted multiplication is computationally expensive evaluating the face dissimilarity score can be very slow [49]. This problem is further exacerbated by the high dimensionality of the face templates, typically running into hundreds to thousands of dimensions.

Addition and multiplication of two integers encoded in this manner translates to just polynomial addition and multiplication in R_t . As long as the coefficients of the resulting polynomials do not exceed p and their degrees do not exceed $(x^n + 1)$, correctness is ensured and we can recover the score by evaluating the polynomial at $x = 2$. These constraints, however, render this scheme impractical for large volumes of face matching. To support computations involving many high-precision real-values from the facial features, we would require prohibitively large values of n and t under this representation.

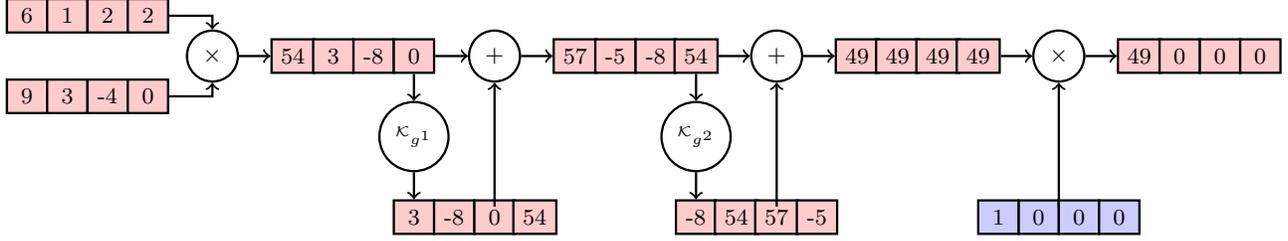


Figure 3: Homomorphic computation of inner product between vectors using batching, where multiple elements are encrypted into a single encrypted block. The batching process does not allow access to each element of the encrypted block. Therefore, after the Hadamard product, the sum of the elements within the encrypted block can be computed through repeated cyclic rotations and additions.

3.4. Efficient Homomorphic Face Matching

While the algorithm described above can be directly utilized for face matching, it suffers from very high computational requirements. For instance using this algorithm for matching a pair of 512-dimensional facial features requires about 0.6 secs for a desired security level of 128 bits. We present a few different solutions to address these limitations. First, we describe a quantization scheme to encode facial features in R_t . Then, we describe a batching scheme for encoding a vector of real-values into a single polynomial using the Chinese Remainder Theorem. This encoding allows us to amortize multiple homomorphic multiplications within a single homomorphic multiplication, thereby providing significant computational speedups. We then leverage classical dimensionality reduction algorithms to further reduce the computational burden of homomorphic face matching.

Data Representation: The efficiency of homomorphic additions and multiplications is critically dependent on the encoding scheme chosen to represent the real-valued elements of the face template with a polynomial ring R_t . The space of ring R_t is significantly different from the space of real values \mathbb{R} or the space of integers \mathbb{Z} . Therefore, to maintain the integrity of the homomorphic computations, the chosen encoding scheme needs to ensure that the range of values after the homomorphic encryption remain within the ring. In this paper, we first encode real-valued face features into integers with a precision of two decimal digits and then utilize a binary encoding scheme to represent these integers.

$$Encoding(a) = sign(a)(a_{n-1}x^{n-1} + \dots + a_1x + a_0) \quad (4)$$

Therefore this encoding scheme can represent any integer in $-(2^n - 1) \leq a \leq (2^n - 1)$.

Batching: The main computational bottleneck of face matching over encrypted data is the number of homomorphic multiplications necessary for face matching. Brakerski *et al.* [8] and Smart *et al.* [44] proposed techniques for homomorphic encryption and decryption over an array of

numbers instead of a single number at a time. These techniques leverage the Chinese Remainder Theorem (CRT) and encode multiple numbers within the same polynomial. For instance, given the primitive $2n$ -th root of unity modulo t , we have: $x^n + 1 = (x - \xi)(x - \xi^3) \dots (x - \xi^{2n-1}) \pmod t$

The CRT factorizes the ring R_t when we choose t to be a product of many small prime factors i.e., $t = \prod_{i=1}^k t_i$, where p_1, \dots, p_k are distinct prime numbers. Given these primes, we can perform computations modulo each prime and recover the computation with respect to the product of the primes by using the CRT. The computations with respect to the primes are independent of each other and hence can be implemented in parallel.

Given two packed vectors x and y , the sum and Hadamard product of the two vectors can simply be computed as element-wise addition and multiplication, respectively, of the encrypted vectors. By batching k numbers into a single encrypted block, we can perform k homomorphic additions or multiplications at the block level for the computational cost of a single operation. Therefore, as the batch size gets larger, we can realize significant computational efficiency. The main drawback of this scheme, however, is the inability to access the individual elements of the encrypted block, thereby preventing us from computing the sum of the elements, necessary for computing dissimilarity score (Eq. 3), within the packed encrypted vector. This limitation can be addressed by leveraging the observation made by Gentry *et al.* [17], who showed that it is possible to cyclically rotate the encrypted vectors without the need for decryption. By cyclically rotating and adding ($l = \log_v^q$ times) the encrypted vectors, the sum of the encrypted values can be computed. Figure 3 and Algorithm 1 provide a pictorial and algorithmic illustration of this process.

Dimensionality Reduction: The high computational cost of face matching over encrypted data depends on two factors, (1) the high computational cost of one homomorphic multiplication, and (2) the high dimensionality of the face templates. While the former is addressed to an extent by the batching scheme, there are further avenues for mitigat-

Table 1: Timing and Security Parameters

Security (λ)	Dim (d)	No FHE Time (μ s)	Parameters			Batching Time (ms)				No Batching Time (ms)			
			n	t (bits)	q	Enc	Score	Dec	Total	Enc	Score	Dec	Total
128-bit	64	0.44	128	110	40961	0.07	0.17	0.01	0.25	4.40	5.25	0.01	9.66
	128	0.89	256	110	40961	0.14	0.38	0.02	0.59	17.57	21.05	0.02	38.64
	512	3.48	1024	110	40961	0.58	1.80	0.07	2.45	280.19	343.81	0.08	624.07
	1024	7.49	2048	110	40961	1.14	4.02	0.15	5.80	1135.44	1411.82	0.16	2547.42
	1024	7.49	4096	110	40961	2.27	8.36	0.30	11.42	2214.88	2924.75	0.33	5139.97
192-bit	64	0.44	128	77	40961	0.07	0.17	0.01	0.25	4.38	5.25	0.01	9.64
	128	0.89	256	77	40961	0.15	0.39	0.02	0.55	17.24	21.07	0.02	38.33
	512	3.48	1024	77	40961	0.58	1.85	0.07	2.50	274.11	343.60	0.08	617.79
	1024	7.49	2048	77	40961	1.17	4.03	0.15	5.35	1134.22	1410.99	0.16	2545.38
	1024	7.49	4096	77	40961	2.33	8.91	0.30	11.54	2214.96	2889.39	0.33	5104.68

Algorithm 1 Homomorphic Inner Product

```

1: procedure ENCRYPTEDINNERPRODUCT( $m, m'$ )
2:    $\mathcal{E}(x) \leftarrow f(x, \theta_e)$   $\triangleright$  CRT Encoding
3:    $\mathcal{E}(y) \leftarrow f(y, \theta_e)$   $\triangleright$  CRT Encoding
4:    $ct \leftarrow \text{Multiply}(\mathcal{E}(x), \mathcal{E}(y))$   $\triangleright$  Batch Multiply
5:   for  $i = \{0, \dots, l\}$  do
6:      $ct' \leftarrow ct' + \mathcal{K}_{g^i}(ct')$   $\triangleright$  Cyclic Rotation
7:   end for
8:   return  $ct'$   $\triangleright$  The element in the first slot is the
   desired inner product.
9: end procedure

```

ing the computational burden by reducing the dimensionality of the face template. While a variety of dimensionality reduction algorithms exist (ISOMAP [48], LLE [41], random projections [11] etc.), we consider classical Principal Component Analysis based dimensionality reduction as an illustrative example.

Key Switching: In a practical deployment of face recognition systems, it is natural to consider the scenario where each user utilizes their own set of public encryption (θ_e^c) and private decryption keys (θ_d^c). This results in a scenario where face templates encrypted through one set of encryption keys have to be re-encrypted through another set of encryption keys without decrypting the template. The key-switching operation is similar to the multiplication operation described above.

3.5. Security Analysis:

The proposed system has three sources of attack, (1) the client device, (2) the communication channel between the client and the database, and (3) the database itself. The security of the client device is of paramount importance, since the device stores the private decryption key and is also the source of the raw facial images and the extracted facial features. We assume the “honest-but-curious” secu-

rity model where all the parties honestly follow the protocol and learn nothing beyond their own outputs. Under this security model, the communication channel is secure from a malicious attacker, since the encrypted facial template cannot be decrypted without access to the secret key. Similarly the facial database itself, which consists of the user’s identity label and encrypted facial templates, is secure without the access to the secret decryption keys.

4. Experiments

The goal of this paper is to explore the feasibility and efficacy of using fully homomorphic encryption for the purpose of face matching over encrypted data. Towards this end, for our experimentation we consider two different state-of-the-art deep neural network based face representations, namely, FaceNet [42] and SphereFace [25] with 128 and 512 (or 1024) dimensional features, respectively.

We evaluate these representations over multiple datasets of varying complexity. Specifically, we consider the following datasets (1) **LFW [19]** consisting of 13,233 face images of 5,749 subjects, downloaded from the web. These images exhibit limited variations in pose, illumination, and expression, (2) **IJB-A [22]:** The IARPA Janus Benchmark-A (IJB-A) dataset consisting of 500 subjects with a total of 25,813 images (5,399 still images and 20,414 video frames). This is a challenging dataset exhibiting i) full pose variation, ii) a mix of images and videos, and iii) wider geographical variation of subjects, (3) **IJB-B [52]:** The IARPA Janus Benchmark-B (IJB-B) dataset consists of 1,845 subjects with a total of 76,824 images (21,798 still images and 55,026 video frames from 7,011 videos). This dataset is a larger superset of the IJB-A dataset, with more subjects and greater facial appearance variations, and (4) **CA-SIA [53]:** A large collection of labeled images downloaded from the web (based on names of famous personalities) typically used for training deep neural networks. It consists of 494,414 images across 10,575 subjects, with an average of about 500 face images per subject. This dataset was used to

Table 2: Face Recognition Accuracy (TAR @ FAR in %)

Dataset	Method	128-D FaceNet			512-D SphereFace			64-D PCA FaceNet			64-D PCA SphereFace		
		0.01%	0.1%	1%	0.01%	0.1%	1%	0.01%	0.1%	1%	0.01%	0.1%	1%
LFW	No FHE	84.06	94.56	98.65	90.49	96.74	99.11	83.99	94.64	98.73	88.41	95.80	98.87
	FHE (2.5×10^{-3})	84.05	94.56	98.65	90.49	96.74	99.11	84.00	94.64	98.72	88.38	95.80	98.87
	FHE (1.0×10^{-2})	83.89	94.53	98.66	90.46	96.73	99.11	83.94	94.62	98.72	88.38	95.80	98.87
	FHE (1.0×10^{-1})	78.82	92.58	98.35	84.78	94.72	98.64	78.18	93.06	98.41	84.32	94.38	98.69
IJB-A	No FHE	23.13	45.92	70.26	7.27	30.40	67.89	20.13	46.07	73.71	6.81	28.92	67.59
	FHE (2.5×10^{-3})	23.12	45.94	70.27	7.27	30.40	67.89	20.08	46.14	73.66	6.81	28.92	67.59
	FHE (1.0×10^{-2})	22.83	45.78	70.17	7.25	30.39	67.66	19.92	46.05	73.81	6.80	28.92	67.45
	FHE (1.0×10^{-1})	19.82	42.74	68.37	7.20	30.00	65.23	17.54	44.02	72.11	6.68	27.43	66.76
IJB-B	No FHE	25.77	48.31	74.47	7.86	31.27	69.83	24.95	47.80	74.58	7.13	29.72	69.79
	FHE (2.5×10^{-3})	25.78	48.28	74.46	7.86	31.27	69.82	25.06	47.78	74.66	6.85	29.70	69.69
	FHE (1.0×10^{-2})	25.71	48.31	74.44	7.80	31.29	69.75	24.90	47.97	74.50	6.86	29.85	69.52
	FHE (1.0×10^{-1})	23.75	46.08	72.87	7.49	30.92	67.45	22.79	45.80	73.12	6.90	29.82	69.55
CASIA	No FHE	70.98	84.70	93.29	86.48	90.81	93.83	70.85	84.76	93.35	82.87	89.07	92.80
	FHE (2.5×10^{-3})	70.98	84.70	93.29	86.47	90.81	93.83	70.94	84.82	93.33	82.78	89.04	92.78
	FHE (1.0×10^{-2})	70.96	84.68	93.28	86.47	90.83	93.81	70.92	84.82	93.32	82.74	89.00	92.79
	FHE (1.0×10^{-1})	70.82	84.66	93.25	83.21	89.49	93.05	70.88	84.79	93.32	78.82	87.29	92.16

train the FaceNet and SphereFace representations.

4.1. Implementation Details

Our implementation is based on the NTL C++ Library [43]. For all experiments, we used a machine with a 4-core Intel i5-6400 processor running at 2.7 GHz. All of our experiments were run in a single-threaded environment. Before we perform face matching experiments it is crucial to determine the necessary parameters needed for the security and correctness of the face matching process. For a given desired level of security, Table 1 shows the effect of the different parameter settings (n , q and t) and the dimensionality of the facial features on the computational complexity of face matching over encrypted features. We also report a breakdown of the time taken for each of the steps in the matching process as well as the total time. We observe that the fastest FHE based face matching is admittedly over 1000x slower than matching in the real-domain. Nevertheless, batching and dimensionality reduction can offer significant a speed-up ($\sim 300x$) over element-wise homomorphic face matching. These results suggest that face matching over encrypted templates using fully homomorphic encryption can provide high levels of security, 128 to 192 bits, and real-time matching over small database of face templates.

4.2. Homomorphic Face Matching

We report the results of our face matching experiments on benchmark datasets for two different, FaceNet [42] and SphereFace [25], state-of-the-art face representations in Table 2. For each of these representations, aligned and nor-

malized face images are propagated¹ through the corresponding neural networks to extract facial templates of 128 and 512 dimensions, respectively. We report true acceptance rate (TAR) at three different operating points of 0.01%, 0.1% and 1.0% false accept rate (FAR). We first evaluate face matching performance over unencrypted face templates as a baseline to compare against. Since FHE operates on integer representations of the face templates, we consider two different quantization schemes for each element of the face features, one with a precision of 0.01 and another with a precision of 0.0025. We observe that the performance of the later scheme, by way of being a more precise representation of the raw features, is competitive with the performance of the unencrypted features. Therefore, the homomorphic face matching over encrypted features can be as performant as the raw features while providing template protection, preventing information leakage and preserving the privacy of the users. Finally, our experimental results suggest that even simple PCA based dimensionality reduction can perform comparably to the original high-dimensional features, while affording significant homomorphic face matching efficiency.

5. Conclusion

In this paper, we explored the possibility of securing and matching a database of face templates using fully homomorphic encryption, a class of cryptosystems that allows basic addition and multiplication of numbers directly over encrypted data. Utilizing a batching scheme, that performs

¹We use publicly available implementations, <https://github.com/davidsandberg/facenet> and <https://github.com/wyliu/sphereface>.

multiple homomorphic multiplications in a single operation, and a dimensionality reduction scheme, our framework affords significant computational efficiencies. Specifically, our framework is able to match a pair of 512-dimensional face templates in about 0.01 secs with minimal loss in matching accuracy over multiple benchmark face datasets (LFW, IJB-A, IJB-B, CASIA). These results suggest that fully homomorphic encryption could be a viable practical solution for accurate face matching in the encrypted domain, and can help prevent information leakage and preserve the privacy of users.

References

- [1] T. Ahonen, A. Hadid, and M. Pietikäinen. Face recognition with local binary patterns. *ECCV*, 2004.
- [2] A. Albiol, D. Monzo, A. Martín, J. Sastre, and A. Albiol. Face recognition using hog+ebgm. *Pattern Recognition Letters*, 29(10):1537–1543, 2008.
- [3] Y. Aono, T. Hayashi, L. T. Phong, and L. Wang. Fast and secure linear regression and biometric authentication with security update. *IACR Cryptology ePrint Archive*, 2015:692, 2015.
- [4] M. Barni, T. Bianchi, D. Catalano, M. Di Raimondo, R. Donida Labati, P. Failla, D. Fiore, R. Lazzeretti, V. Piuri, F. Scotti, et al. Privacy-preserving fingerprint authentication. In *ACM workshop on Multimedia and security*. ACM, 2010.
- [5] M. Barni, T. Bianchi, D. Catalano, M. Di Raimondo, R. D. Labati, P. Failla, D. Fiore, R. Lazzeretti, V. Piuri, A. Piva, et al. A privacy-compliant fingerprint recognition system based on homomorphic encryption and fingerprint templates. In *BTAS*. IEEE, 2010.
- [6] M. Barni, G. Droandi, and R. Lazzeretti. Privacy protection in biometric-based recognition systems: A marriage between cryptography and signal processing. *IEEE Signal Processing Magazine*, 32(5):66–76, 2015.
- [7] V. N. Boddeti and B. V. Kumar. A framework for binding and retrieving class-specific information to and from image patterns using correlation filters. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 35(9):2064–2077, 2013.
- [8] Z. Brakerski, C. Gentry, and S. Halevi. Packed ciphertexts in lwe-based homomorphic encryption. In *Public-Key Cryptography—PKC 2013*, pages 1–13. Springer, 2013.
- [9] Z. Brakerski and V. Vaikuntanathan. Fully homomorphic encryption from ring-lwe and security for key dependent messages. In *Annual cryptology conference*, pages 505–524. Springer, 2011.
- [10] J. H. Cheon, H. Chung, M. Kim, and K.-W. Lee. Ghostshell: Secure biometric authentication using integrity-based homomorphic evaluations. *IACR Cryptology ePrint Archive*, 2016:484, 2016.
- [11] S. Dasgupta. Experiments with random projection. In *Proceedings of the Sixteenth Conference on Uncertainty in Artificial Intelligence*, pages 143–151. Morgan Kaufmann Publishers Inc., 2000.
- [12] G. I. Davida, Y. Frankel, and B. J. Matt. On enabling secure applications through off-line biometric identification. In *IEEE Symposium on Security and Privacy*, pages 148–157. IEEE, 1998.
- [13] T. ElGamal. A public key cryptosystem and a signature scheme based on discrete logarithms. *IEEE Transactions on Information Theory*, 31(4):469–472, 1985.
- [14] J. Fan and F. Vercauteren. Somewhat practical fully homomorphic encryption. *IACR Cryptology ePrint Archive*, 2012:144, 2012.
- [15] C. Fontaine and F. Galand. A survey of homomorphic encryption for nonspecialists. *EURASIP Journal on Information Security*, 2007:15, 2007.
- [16] C. Gentry. *A fully homomorphic encryption scheme*. Stanford University, 2009.
- [17] C. Gentry, S. Halevi, and N. P. Smart. Fully homomorphic encryption with polylog overhead. In *Annual International Conference on the Theory and Applications of Cryptographic Techniques*, pages 465–482. Springer, 2012.
- [18] O. Goldreich. *Foundations of cryptography: volume 2, basic applications*. Cambridge university press, 2009.
- [19] G. B. Huang, M. Ramesh, T. Berg, and E. Learned-Miller. Labeled faces in the wild: A database for studying face recognition in unconstrained environments. Technical report, Technical Report 07-49, University of Massachusetts, Amherst, 2007.
- [20] A. K. Jain, K. Nandakumar, and A. Nagar. Biometric template security. *EURASIP Journal on Advances in Signal Processing*, 2008:113, 2008.
- [21] A. Juels and M. Sudan. A fuzzy vault scheme. *Designs, Codes and Cryptography*, 38(2):237–257, 2006.
- [22] B. F. Klare, B. Klein, E. Tabor, A. Blanton, J. Cheney, K. Allen, P. Grother, A. Mah, and A. K. Jain. Pushing the frontiers of unconstrained face detection and recognition: Iarpa janus benchmark a. In *CVPR*, 2015.
- [23] R. L. Legendijk, Z. Erkin, and M. Barni. Encrypted signal processing for privacy protection: Conveying the utility of homomorphic encryption and multiparty computation. *IEEE Signal Processing Magazine*, 30(1):82–105, 2013.
- [24] Y. J. Lee, K. R. Park, S. J. Lee, K. Bae, and J. Kim. A new method for generating an invariant iris private key based on the fuzzy vault system. *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, 38(5):1302–1313, 2008.
- [25] W. Liu, Y. Wen, Z. Yu, M. Li, B. Raj, and L. Song. Sphreface: Deep hypersphere embedding for face recognition. In *CVPR*, volume 1, 2017.
- [26] Z. Liu, P. Luo, X. Wang, and X. Tang. Deep learning face attributes in the wild. In *ICCV*, 2015.
- [27] D. G. Lowe. Object recognition from local scale-invariant features. In *ICCV*, 1999.
- [28] C. Lu and X. Tang. Surpassing human-level face verification performance on lfw with gaussianface. In *AAAI*, 2015.
- [29] G. Mai, K. Cao, P. C. Yuen, and A. K. Jain. Face image reconstruction from deep templates. *arXiv preprint arXiv:1703.00832*, 2017.
- [30] D. Maltoni, D. Maio, A. K. Jain, and S. Prabhakar. *Handbook of fingerprint recognition*. Springer Science & Business Media, 2009.

- [31] K. Nandakumar, A. Nagar, and A. K. Jain. Hardening fingerprint fuzzy vault using password. In *ICB*. Springer, 2007.
- [32] M. Naor and A. Shamir. Visual cryptography. In *Workshop on the Theory and Application of Cryptographic Techniques*, pages 1–12. Springer, 1994.
- [33] P. Paillier. Public-key cryptosystems based on composite degree residuosity classes. In *International Conference on the Theory and Applications of Cryptographic Techniques*, pages 223–238. Springer, 1999.
- [34] O. M. Parkhi, A. Vedaldi, and A. Zisserman. Deep face recognition. In *BMVC*, 2015.
- [35] V. M. Patel, N. K. Ratha, and R. Chellappa. Cancelable biometrics: A review. *IEEE Signal Processing Magazine*, 32(5):54–65, 2015.
- [36] G. M. Penn, G. Pötzelsberger, M. Rohde, and A. Uhl. Customisation of paillier homomorphic encryption for efficient binary biometric feature vector matching. In *International Conference of the Biometrics Special Interest Group (BIOSIG)*, pages 1–6. IEEE, 2014.
- [37] Y. S. Rao, Y. Sukonkina, C. Bhagwati, and U. K. Singh. Fingerprint based authentication application using visual cryptography methods (improved id card). In *IEEE Region 10 Conference (TENCON)*, pages 1–5. IEEE, 2008.
- [38] N. K. Ratha, J. H. Connell, and R. M. Bolle. Enhancing security and privacy in biometrics-based authentication systems. *IBM systems Journal*, 40(3):614–634, 2001.
- [39] P. Revenkar, A. Anjum, and W. Gandhare. Secure iris authentication using visual cryptography. *arXiv preprint arXiv:1004.1748*, 2010.
- [40] A. Ross and A. Othman. Visual cryptography for biometric privacy. *IEEE Transactions on Information Forensics and Security*, 6(1):70–81, 2011.
- [41] S. T. Roweis and L. K. Saul. Nonlinear dimensionality reduction by locally linear embedding. *Science*, 290(5500):2323–2326, 2000.
- [42] F. Schroff, D. Kalenichenko, and J. Philbin. Facenet: A unified embedding for face recognition and clustering. In *CVPR*, pages 815–823, 2015.
- [43] V. Shoup. Number theory c++ library (ntl) version 11.0.0, 2003.
- [44] N. P. Smart and F. Vercauteren. Fully homomorphic simd operations. *Designs, codes and cryptography*, 71(1):57–81, 2014.
- [45] C. Soutar, D. Roberge, A. Stoianov, R. Gilroy, and B. V. Kumar. Biometric encryption using image processing. In *Optical Security and Counterfeit Deterrence Techniques II*, volume 3314, pages 178–189. International Society for Optics and Photonics, 1998.
- [46] C. Soutar, D. Roberge, A. Stoianov, R. Gilroy, and B. V. Kumar. Biometric encryption. *ICSA guide to Cryptography*, pages 649–675, 1999.
- [47] Y. Taigman, M. Yang, M. Ranzato, and L. Wolf. Deepface: Closing the gap to human-level performance in face verification. In *CVPR*, 2014.
- [48] J. B. Tenenbaum, V. De Silva, and J. C. Langford. A global geometric framework for nonlinear dimensionality reduction. *Science*, 290(5500):2319–2323, 2000.
- [49] J. R. Troncoso-Pastoriza, D. Gonzalez-Jimenez, and F. Perez-Gonzalez. Fully private noninteractive face verification. *IEEE Transactions on Information Forensics and Security*, 8(7):1101–1114, 2013.
- [50] M. A. Turk and A. P. Pentland. Face recognition using eigenfaces. In *CVPR*, 1991.
- [51] U. Uludag, S. Pankanti, and A. K. Jain. Fuzzy vault for fingerprints. In *International Conference on Audio-and Video-Based Biometric Person Authentication*, pages 310–319. Springer, 2005.
- [52] C. Whitelam, E. Taborsky, A. Blanton, B. Maze, J. Adams, T. Miller, N. Kalka, A. K. Jain, J. A. Duncan, K. Allen, et al. IARPA janus benchmark-b face dataset. In *CVPRW*, 2017.
- [53] D. Yi, Z. Lei, S. Liao, and S. Z. Li. Learning face representation from scratch. *arXiv preprint arXiv:1411.7923*, 2014.